




Ritec ClearShield® Durable 'Non-Stick'
Easy-Clean Glass Surface Protection



NEW! ClearPad™ VPIR-200

vertical pad Ritec ClearShield® application with IR pre-heating
PROCESS FASTER • LESS LABOR • INCREASE PROFIT

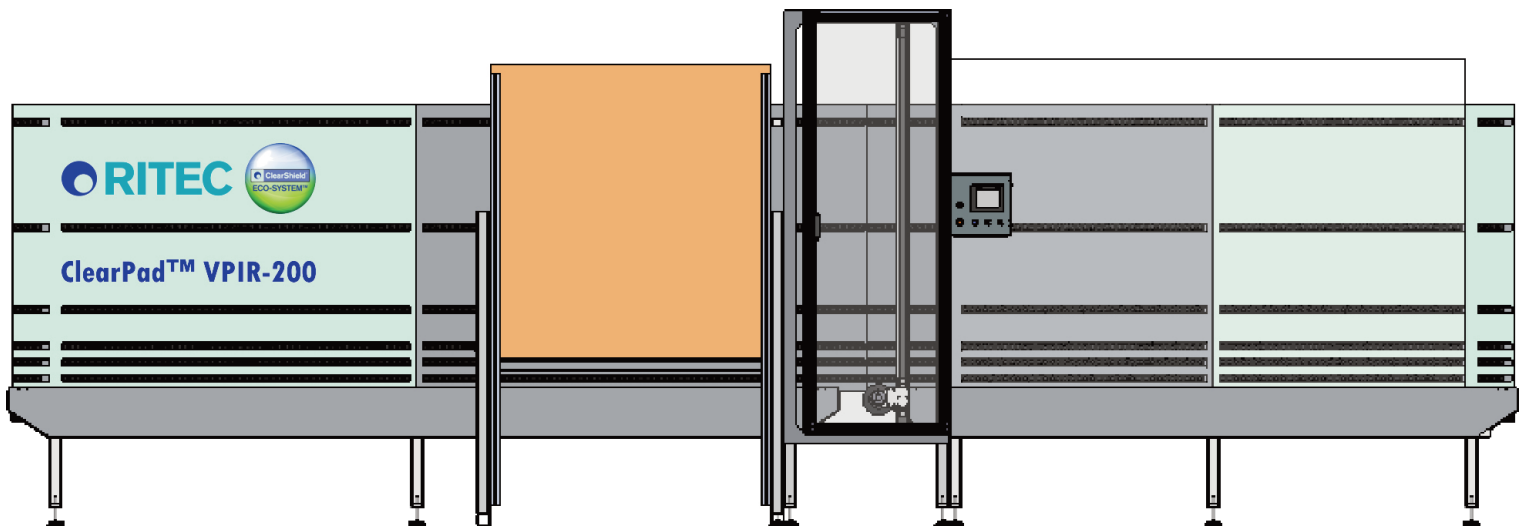

- The most efficient way of pad-applying Ritec ClearShield®
- Reduces handling, labor costs and application training
- Faster production with IR pre-heating for instant curing
- Increased and consistent coverage rate
- Management and control software to maximize product usage and avoid waste
- Small footprint



TECHNICAL SPECIFICATIONS

Model:	ClearPad™ VPIR-200
Construction:	Powder coated mild steel frame
Power Consumption:	10kW
Voltage:	380 - 415V
Footprint:	Width 23' 10 5/8" (7280mm) Height 8' 2 5/8" (2505mm) Depth 2' 9" (838mm)
Rate per Hour (linear):	394 linear feet (120 linear meters)
Rate per Hour (area):	2,067ft ² (192m ²)
Minimum Glass Size:	Width 1' 7 11/16" (500mm) Height 7 7/8" (200mm) Thickness 5/64" (2mm)
Maximum Glass Size:	Width 8' 3" (2500mm) Height 5' 3" (1600mm) Thickness 1 1/8" (28mm)
Actuator:	Linear

All specifications correct at time of printing (September 2022). Ritec International Limited reserve the right to change or modify specifications and / or parts without prior notice.

ClearShield Technologies LLC

A subsidiary of Ritec International Limited, UK

1-847-671-4584

info@clearshieldonline.com

www.clearshieldonline.com